



Kombi-Aufsteckfräserdorne DIN 6358

Combi shell mill holders DIN 6358

Porte-fraises à double usage DIN 6358

DIN 2080



Verwendung:


Zur Aufnahme von Walzen-, Walzenstirnfräsern oder Messerköpfen mit Längs- oder Quernut.

Application:

For mounting milling cutters with transverse or longitudinal groove.

Application:

Pour le serrage de fraises à rainure transversale ou à rainure longitudinale.

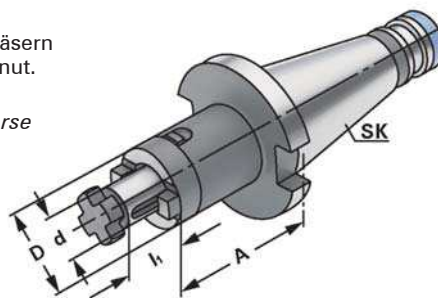

G 6,3 12.000 min⁻¹

≤ 0,005

Bestell-Nr. Order no. Référence	SK	d _{h6}	A	l ₁	D
301.10.16	SK 30	16	35	25	32
301.10.22	SK 30	22	35	25	40
301.10.27	SK 30	27	35	25	48
301.10.32	SK 30	32	50	40	58
401.10.16	SK 40	16	52	40	32
401.10.22	SK 40	22	52	40	40
401.10.27	SK 40	27	52	40	48
401.10.32	SK 40	32	52	40	58
401.10.40	SK 40	40	52	40	70
501.10.16	SK 50	16	55	40	32
501.10.22	SK 50	22	55	40	40
501.10.27	SK 50	27	55	40	48
501.10.32	SK 50	32	55	40	58
501.10.40	SK 50	40	55	40	70

Lieferumfang: Mit Fräseranzugsschraube, Mitnehmerring und Passfeder

Delivery: With tightening bolt, driving ring and feather key

Livraison: Avec vis de blocage, bague d'entraînement et clavette

